

Clair Lighting LED Fury Light

Input Power: AC110-220V 50~60Hz

Power: 100W

Lamp Source: 2pcs x 15W RGBW LED

Control Mode: Auto , Sound, DMX512, Master-Slave

Dimmer: 0~100% Smooth dimming

Strobe: 20times/second


CLAIR LIGHTING LED Fury Light

ADDR	1-512	Address selection mode
CHND	1/ 3/ 11	Channel selection
SLND	MAST/ SL 1/ SL 2	Master-Slave selection
SHND	SH0 - SH8	Effects selection mode
BLND	NO/YES	Boot selection
LED	ON/OFF	Backlight selection mode
DISP	DISP/ PSID	Display flip setting
TEST		Auto Testing
FHRS		ON power usage record
VER		Current software version
REST		Reset

DMX 512 Channel Description

1 Channel	DMX Value	
Ch1	0-29	Stop
	30-255	Sound Control
3 Channel		
Ch1	0	Off
	1-199	Dimmer
	200-247	Strobe
	248-255	Full Light
Ch2	000-255	RGBW Color Mixing
Ch3	0-9	Stop
	10-120	Motor Rotation, Fast to slow
	121-134	Stop
	135-245	Motor Rotation, Slow to fast
	246-255	Stop
11 Channel		
Ch1	0	Close Light
	1-199	Dimmer
	200-247	Strobe
	248-255	Full Light
Ch2	000-255	Red 1 Dimming
Ch3	000-255	Green 1 Dimming
Ch4	000-255	Blue 1 Dimming
Ch5	000-255	White 1 Dimming
Ch6	000-255	Red 2 Dimming

Ch7	000-255	Green 2 Dimming
Ch8	000-255	Blue 3 Dimming
Ch9	000-255	White 4 Dimming
Ch10	0-9	Close Light
	10-255	RGBW Color Mixing
Ch11	0-9	Stop
	10-120	Motor Rotation ,Fast to slow
	121-134	Stop
	135-245	Motor Rotation ,Slow to fast
	246-255	Stop

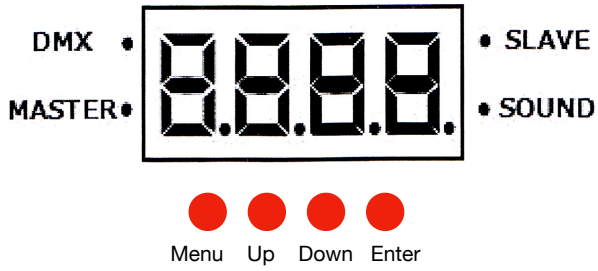

MENU- Menu Key

UP/DOWN- Menu Select Key

ENTER- Save/Store Key